

YZF2DT SETTING SHEET Ver.02

CIRCUIT

EURO 2016

INDOOR OUTDOOR

DIRT ASTROTURF CARPET GLASS WOOD

WET DRY DUSTY SMOOTH BUMPY

HARD PACKED CLAY BLUE GROOVE _____

LOW TRACTION MED TRACTION HIGH TRACTION

DRIVER Daniel Kobbevik

DATE 2016/7/27

FRONT

Flat
 Gull
 Z2-017D(Plastic)

Z2-300FU
 S (Plastic)
 N (Plastic)

Flat Gull
 Graphite

Z2-300FLO
 Z2-300FL5
 B2-300FL(Steel)
 S (Plastic)

Z2-200
 0 mm

CAMBER 1 °

TOE IN OUT 1 °

RIDE HEIGHT 23 mm

Graphite
 4.3
 5.0

Graphite
 Z2-415A

2.0°
 2.5°
 5°

SPRING

YELLOW (YS-A875)
 Blue (AE)

OIL

35 (AE)

#1 #2 #3
 1.6mm x 2 (BM-S162)

mm x
mm x

SD-008RC

REAR

Aluminum
 Z2-300SRF

Aluminum
 Z2-300SRR

RF
 RR

-0.5°
 0°
 +0.5°

H1
 H2
 H3
 2-H4
 3-LH

CAMBER 1 °

RIDE HEIGHT 23 mm

0°
 0.5°
 1°

0 mm
 2 mm

Z2-300RUD
 5.0
 6.0

Z2-008R
 Z4-008RS4

SPRING

GREEN (YS-A1200)
 Green (AE)

OIL

30 (AE)

#1 #2 #3
 1.7mm x 2 (BM-S172)

mm x
mm x

DRIVE



MOTOR YOKOMO Racing Performer 7.5T Rotor _____ mm


GEAR Spur 80 T / Pinion 22 T : 2.6

BATTERY Racing Performer Ultra Li-po Shorty

ESC YOKOMO RPX YOKOMO BL-PRO

Battery placement

5mm x _____
 10mm x _____
 20mm x _____

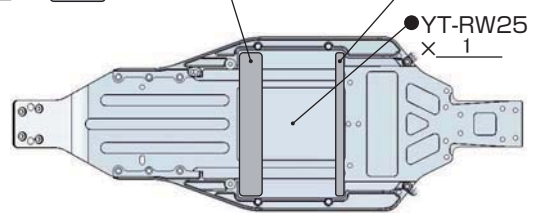

TIRE

FRONT

TIRE PL 8175 M3

INSERTS Std

WHEELS YOKOMO B2-821HW


REAR

TIRE PL Hole shot M3

INSERTS Std

WHEELS YOKOMO B4-827W

OTHER

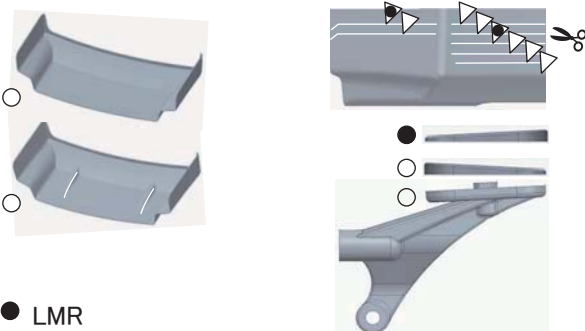

COMMENT

Z2-415RS New aluminum rear hub carrier
 Z2-TSSD
 Z2-TBSD
 Use JC S2 body shell